



Dabliu Touch

INTERACTIVE FLAT PANELS

MODEL W9E

TOUCH 65"



DISPLAY 9

Profesional Digital Equipment and Service

www.display9.com
info@display9.com



INTERACTIVE FLAT PANEL

EVEN MORE SIMPLE TO USE, FOR ALL, EVEN MORE ELEGANT TO BE MOUNTED ANYWHERE



ULTRA-THIN FRAME

Exclusive made in Italy design, curvilinear shape. Easily removable for easy and quick maintenance. Rounded corners


HIGH DEFINITIONS

LED backlight panels, UHD support (65"-75"-86"). Wide Angle Display to enable the vision from greater angles

MULTI TOUCH

Improved touch sensitivity, 20 touch with support of reliable and performing IR sensors

MODEL DBLWE W9E-65-20 T-4K

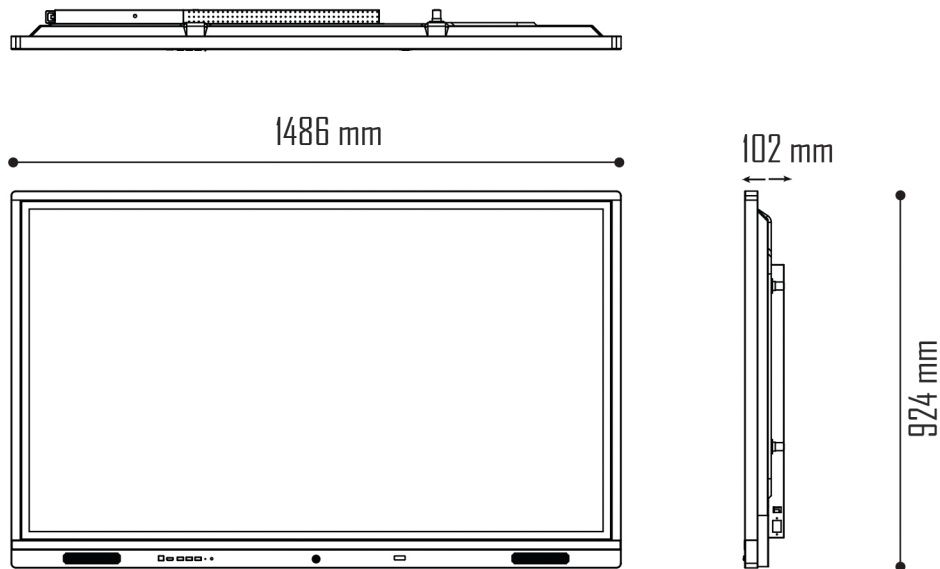

TOUCH PANEL



Touch supported	Windows fino a 20/Android fino a 10
Sistema Operativo	Android
Glass	Warm tempered, 4mm thickness, Anti-glare
Glass hardness	>H7
Writing modes	Fingers, pen or any other non-transparent tool
Technology	Infrared
Accuracy	± 2mm
Response Time	8ms
Cursor speed	180 points/s
Touch resolution	32.768 x 32.768
Supported Operating Systems	Windows da 7 a 10 - Mac OS - Linux



OS Android integrated specifications

Android 9.0
CPU Quad-Core A55
GPU Quad-Core MaliG52
Ram 2 GB
Rom 16 GB
Wireless built-in 802.11 a/b/g/n/ac

App included

Google Classroom, Cisco webex, Meet , microsoft Teams , zoom
EDU App Dabliu note
Mirroring App (optional)
Web Browser app chrome

Software

Oktopus Powered by Wacebo

Optional Software

educational platform cloud author
Platform MDM Cloud author

Optional

Streaming pack

Slot OPS intel standard

Max support 3840*2160/60hz

Net Weight (kg ±2)

35

Net Size (L*H*P)

1486x924x102

Packaging size (L*H*P)

1646x1074x240 mm

Resolution	3840*2160 Pixel (4K)
Screen Features	Led
Aspect Ratio	16:9
Active area	65" UHD 4K 1428x803 mm
Brightness	500 cd/m2
Contrast	Static 1200:1, dynamic 5000:1
Colors	1.07G, 10 bit
Viewing Angle	178° (H) / 178° (V)
Life time (workinghours/day)	50,000 hours
Input Front Side	HDMI x1 USB TOUCH x 1 USB x 3
Input Rear Side	SPDIF x1 USB 2.0 x 2 TF CARD x 1 HDMI 2.0 in x 2 USB Touch x 1 EARPHONE x 1 RJ45 in x 1 VGA AUDIO IN x 1 RS232x1
Front panel buttons	1 Button
Speakers	Frontally integrated , RMS 2X15W
Power	100-240V AC , 50/60 Hz
Consumption	Standby power consumption< 0.5 W Max power consumption < 250 W
Accessory	Interactive Led Panel 65" x1, Pen x2, Remote Control x1, Power cable 1,5mx1, HDMI Cable 1,5m x 1, USB Cable 3m x1, Fixed Wall Mount Bracket x1

